

# Current Transducer LF 1005-S/SP12

$I_{PN} = 600 \text{ A}$

For the electronic measurement of currents : DC, AC, pulsed..., with a galvanic isolation between the primary circuit (high power) and the secondary circuit (electronic circuit).



## Electrical data

$I_{PN}$	Primary nominal r.m.s. current	600	A
$I_P$	Primary current, measuring range	0 .. $\pm 1750$	A
$R_M$	Measuring resistance	$R_{Mmin}$	$R_{Mmax}$
	with $\pm 24 \text{ V}$	@ $\pm 600 \text{ A}_{max}$	3    117 $\Omega$
		@ $\pm 1750 \text{ A}_{max}$	3    5 $\Omega$
$I_{SN}$	Secondary nominal r.m.s. current	120	mA
$K_N$	Conversion ratio	1 : 5000	
$V_C$	Supply voltage (+ 5 %, -7%)	$\pm 24$	V
$I_C$	Current consumption	$28 + I_s$	mA

## Accuracy - Dynamic performance data

$X_G$	Overall accuracy @ $I_{PN}, T_A = 25^\circ\text{C}$	$\pm 0.5$	%
$\epsilon_L$	Linearity error	< 0.1	%
$I_O$	Offset current @ $I_P = 0, T_A = 25^\circ\text{C}$	Typ	$\pm 0.4$ mA
		Max	$\pm 0.8$ mA
$I_{OT}$	Thermal drift of $I_O$	- 40°C .. + 85°C	$\pm 0.3$ mA
$t_r$	Response time <sup>1)</sup> @ 90 % of $I_{PN}$	< 1	$\mu\text{s}$
$di/dt$	di/dt accurately followed	> 100	A/ $\mu\text{s}$
$f$	Frequency bandwidth (- 1 dB)	DC .. 150	kHz

## General data

$T_A$	Ambient operating temperature	- 40 .. + 85	$^\circ\text{C}$
$T_S$	Ambient storage temperature	- 45 .. + 100	$^\circ\text{C}$
$R_S$	Secondary coil resistance @ $T_A = 85^\circ\text{C}$	53	$\Omega$
$m$	Mass	550	g
	Standards	EN 50155 : 1995	

## Features

- Closed loop (compensated) current transducer using the Hall effect
- Insulated plastic case recognized according to UL 94-V0.

## Special features

- $I_P = 0 .. \pm 1750 \text{ A}$
- $V_C = \pm 24 (\pm 5\%, -7\%) \text{ V}$
- Secondary connection on screened cable  $3 \times 0.5 \text{ mm}^2$
- Shield between primary and secondary connected to the cable screening
- Protection diodes against inversion polarity
- The internal protection against overvoltage.

## Advantages

- Excellent accuracy
- Very good linearity
- Low temperature drift
- Optimized response time
- Wide frequency bandwidth
- No insertion losses
- High immunity to external interference
- Current overload capability.

## Applications

- Single or three phases inverter
- Propulsion and braking chopper
- Propulsion converter
- Auxiliary converter
- Battery charger.

## Application Domain

- Traction.

060628/6

Note : <sup>1)</sup> With a di/dt of 100 A/ $\mu\text{s}$ .

## Dimensions LF 1005-S/SP12

### Isolation characteristics

$V_d$	R.m.s. voltage for AC isolation test, 50/60 Hz, 1 mn	5 <sup>2)</sup>	kV
		1 <sup>3)</sup>	kV
		Min	
dCp	Creepage distance	16.55 <sup>4)</sup>	m m
dCl	Clearance distance	16.55 <sup>4)</sup>	m m
CTI	Comparative Tracking Index (Group III a)	175	

Notes : <sup>2)</sup> With a non-insulated primary bar which completely fills the through-hole

<sup>3)</sup> Between secondary and shield

<sup>4)</sup> Distance without length cable.

### Safety



This transducer must be used in electric/electronic equipment with respect to applicable standards and safety requirements in accordance with the manufacturer's operating instructions.



Caution, risk of electrical shock

When operating the transducer, certain parts of the module can carry hazardous voltage (eg. primary busbar, power supply).


Ignoring this warning can lead to injury and/or cause serious damage.

This transducer is a built-in device, whose conducting parts must be inaccessible after installation.

A protective housing or additional shield could be used.

Main supply must be able to be disconnected.

## Dimensions LF 1005-S/SP12 (in mm. 1 mm = 0.0394 inch)

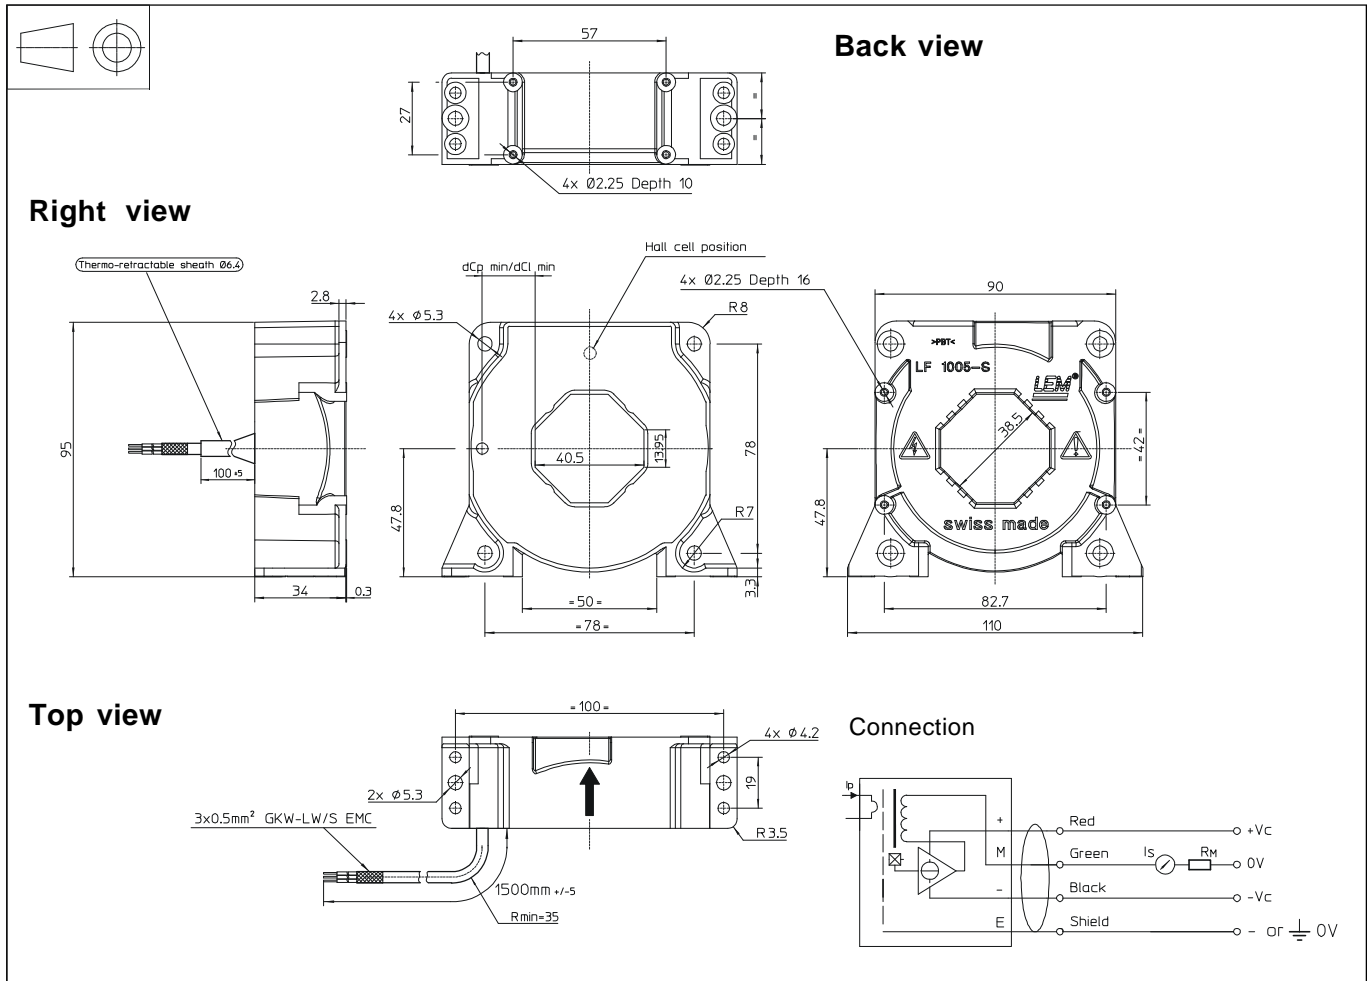

### Mechanical characteristics

- General tolerance  $\pm 0.5$  mm
- Transducer fastening Vertical position
  - 2 holes  $\varnothing 5.3$  mm
  - 2 M5 steel screws
  - Recommended fastening torque or 4 Nm or 2.92 Lb. - Ft.
  - 4 holes  $\varnothing 4.2$  mm
  - 4 M4 steel screws
  - Recommended fastening torque or 3.2 Nm or 2.34 Lb. - Ft.
  - 4 holes  $\varnothing 2.25$  mm depth 10 mm
  - 4xPT KA30 screws long 10 mm
  - Recommended fastening torque 0.9 Nm or 0.66 Lb. - Ft.
- Transducer fastening Horizontal position
  - 4 holes  $\varnothing 5.3$  mm
  - 4 M5 steel screws
  - Recommended fastening torque or 4 Nm or 2.92 Lb. - Ft.
  - 4 holes  $\varnothing 2.25$  mm depth 16 mm
  - 4xPT KA30 screws long 16 mm
  - Recommended fastening torque 1 Nm or 0.73 Lb. - Ft.
- Octagonal primary through-hole or  $40.5 \times 40.5$  mm  $\varnothing 38.5$  mm max
- Connection of secondary screened cable  $3 \times 0.5$  mm<sup>2</sup>

### Remarks

- $I_s$  is positive when  $I_p$  flows in the direction of the arrow.
- Temperature of the primary conductor should not exceed 100°C.
- Dynamic performances (di/dt and response time) are best with a single bar completely filling the primary hole.