

# Current Transducer LTC 1000-TF

$$I_{PN} = 1000 \text{ A}$$

For the electronic measurement of currents : DC, AC, pulsed..., with a galvanic isolation between the primary circuit (high power) and the secondary circuit (electronic circuit).



## Electrical data

$I_{PN}$	Primary nominal r.m.s. current	1000	A
$I_P$	Primary current, measuring range @ 24 V	0 .. $\pm 2400$ <sup>1)</sup>	A
$\hat{I}_P$	Max overload not measurable	10 / 10	kA/ms
$R_M$	Measuring resistance	$R_{Mmin}$	$R_{Mmax}$
	with $\pm 15$ V	@ $\pm 1000$ A <sub>max</sub>	0 15 $\Omega$
		@ $\pm 1200$ A <sub>max</sub>	0 7 $\Omega$
	with $\pm 24$ V	@ $\pm 1000$ A <sub>max</sub>	0 50 $\Omega$
	@ $\pm 2000$ A <sub>max</sub>	0 7 $\Omega$	
$I_{SN}$	Secondary nominal r.m.s. current	200	mA
$K_N$	Conversion ratio	1 : 5000	
$V_C$	Supply voltage ( $\pm 5$ %)	$\pm 15$ .. 24	V
$I_C$	Current consumption	$< 30$ (@ $\pm 24$ V) + $I_S$	mA
$V_d$	R.m.s. voltage for AC isolation test, 50 Hz, 1 mn	13.4 <sup>2)</sup>	kV
		1.5 <sup>3)</sup>	kV
$V_e$	R.m.s. voltage for partial discharge extinction	$> 2.8$	kV

## Features

- Closed loop (compensated) current transducer using the Hall effect
- Insulated plastic case recognized according to UL 94-V0
- Mounting base included
- Railway equipment.

## Advantages

- Excellent accuracy
- Very good linearity
- Low temperature drift
- Optimized response time
- Wide frequency bandwidth
- No insertion losses
- High immunity to external interference
- Current overload capability.

## Accuracy - Dynamic performance data

$X_G$	Overall accuracy @ $I_{PN}$ , $T_A = 25^\circ\text{C}$ @ $I_{PN}$ , $T_A = -40^\circ\text{C} \dots +85^\circ\text{C}$	$< \pm 0.4$	%
		$< \pm 1$	%
$e_L$	Linearity	$< 0.1$	%
		Max	
$I_o$	Offset current @ $I_P = 0$ , $T_A = 25^\circ\text{C}$	$\pm 0.5$	mA
$I_{OT}$	Thermal drift of $I_o$ - $40^\circ\text{C} \dots +85^\circ\text{C}$	$\pm 1$	mA
$t_r$	Response time <sup>4)</sup> @ 90 % of $I_{PN}$	$< 1$	$\mu\text{s}$
$di/dt$	$di/dt$ accurately followed	$> 100$	A/ $\mu\text{s}$
$f$	Frequency bandwidth (-1 dB)	DC .. 100	kHz

## Applications

- AC variable speed drives and servo motor drives
- Static converters for DC motor drives
- Battery supplied applications
- Uninterruptible Power Supplies (UPS)
- Switched Mode Power Supplies (SMPS)
- Power supplies for welding applications.


## General data

$T_A$	Ambient operating temperature	- 40 .. + 85	$^\circ\text{C}$
$T_S$	Ambient storage temperature	- 45 .. + 90	$^\circ\text{C}$
$R_S$	Secondary coil resistance @ $T_A = 85^\circ\text{C}$	44	$\Omega$
$m$	Mass	1300	g
	Standards	EN 50155 (01.12.20)	

- Notes :**
- <sup>1)</sup> With a  $di/dt$  of  $> 5$  A/ $\mu\text{s}$
  - <sup>2)</sup> Between primary and secondary + shield
  - <sup>3)</sup> Between secondary and shield
  - <sup>4)</sup> With a  $di/dt$  of 100 A/ $\mu\text{s}$ .

030604/0

## Dimensions LTC 1000-TF (in mm. 1 mm = 0.0394 inch)

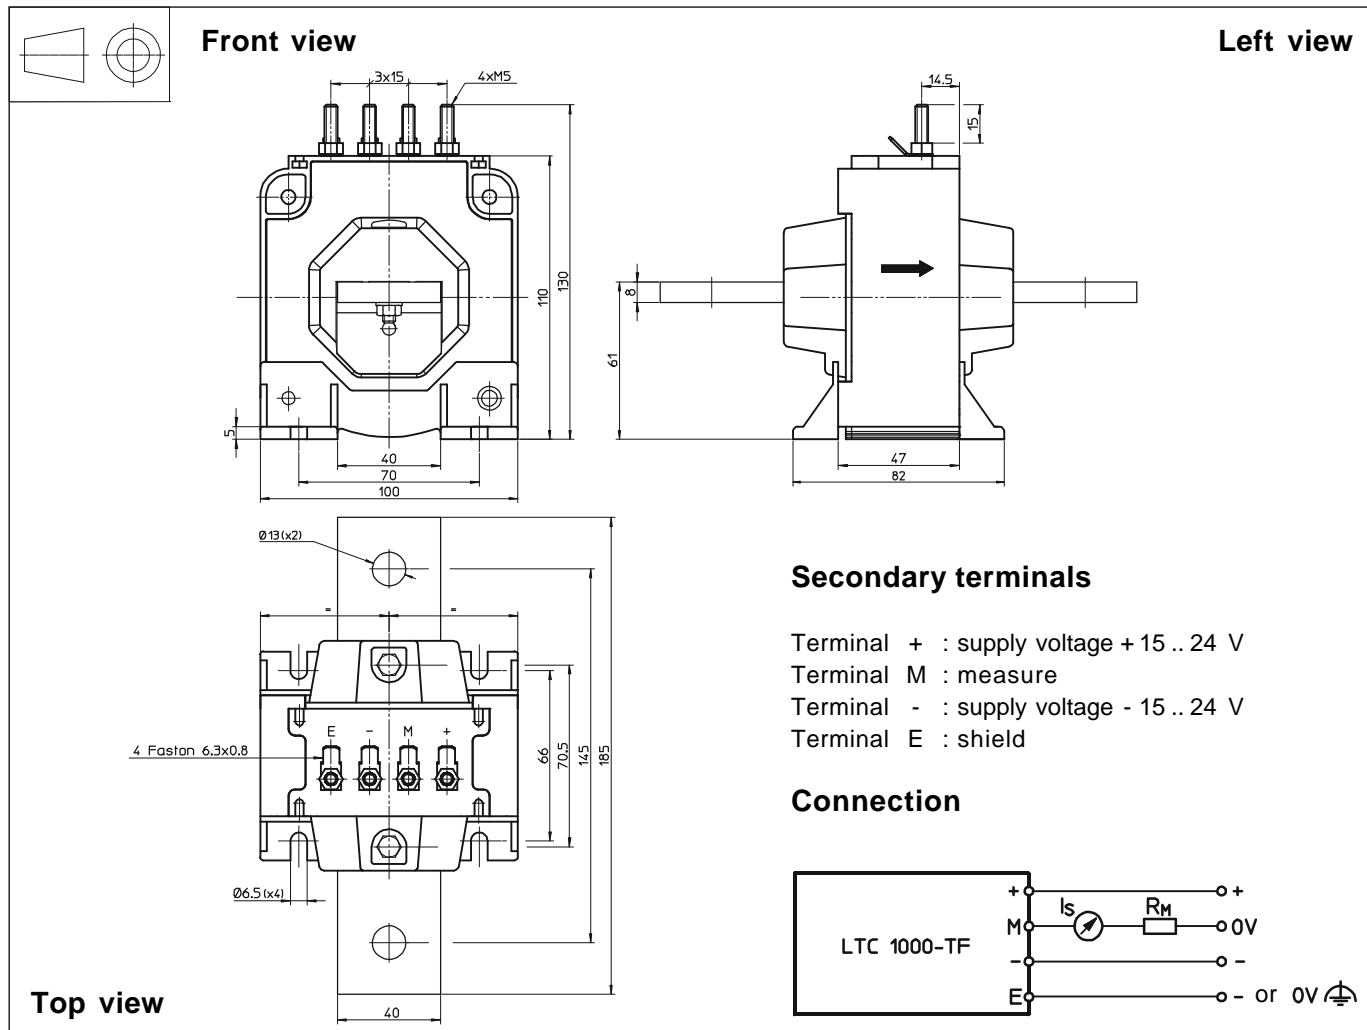

### Mechanical characteristics

- General tolerance  $\pm 1$  mm
- Transducer fastening  
By the primary bar  
2 holes  $\varnothing 13$  mm  
2 x M12 steel screws  
Fastening torque max 24.5 Nm or 18.07 Lb.-Ft.
- Or by fastening feet  
4 slots  $\varnothing 6.5$  mm  
4 x M6 steel screws  
Fastening torque max 5 Nm or 3.69 Lb.-Ft.
- Connection of secondary  
Fastening torque max M5 threaded studs  
2.2 Nm or 1.62 Lb.-Ft.  
Faston 6.3 x 0.8 mm

### Remarks

- $I_s$  is positive when  $I_p$  flows in the direction of the arrow.
- Temperature of the primary conductor should not exceed 100°C.
- Dynamic performances (di/dt and response time) are best with a single bar completely filling the primary hole.