

# Current Transducer LF 305-S/SP16

**$I_{PN} = 300 \text{ A}$**

For the electronic measurement of currents: DC, AC, pulsed..., with galvanic isolation between the primary circuit (high power) and the secondary circuit (electronic circuit).



16117

## Electrical data

$I_{PN}$	Primary nominal current rms	300	A
$I_{PM}$	Primary current, measuring range	0 .. ± 600	A
$R_M$	Measuring resistance @	$T_A = 70^\circ\text{C}$	
		$R_{M \text{ Min}}$ $R_{M \text{ max}}$	
		with ± 24 V	@ ± 300 A <sub>max</sub> 0   77   Ω @ ± 600 A <sub>max</sub> 0   11   Ω
$I_{SN}$	Secondary nominal current rms	150	mA
$K_N$	Conversion ratio	1 : 2000	
$V_C$	Supply voltage (+ 5%/- 5%)	± 24	V
$I_C$	Current consumption	26 (@ ± 24 V) + $I_S$	mA

## Accuracy - Dynamic performance data

$X_G$	Overall accuracy @ $I_{PN}$ , $T_A = 25^\circ\text{C}$	± 0.5	%
$\epsilon_L$	Linearity error	< 0.1	%
$I_O$	Offset current @ $I_p = 0$ , $T_A = 25^\circ\text{C}$	Typ	Max
$I_{OM}$	Magnetic offset current <sup>1)</sup> @ $I_p = 0$ and specified $R_{M^*}$ after an overload of $3 \times I_{PN}$		± 0.20   mA
			± 0.20   mA
$I_{OT}$	Temperature variation of $I_O$ - 10°C .. + 70°C	± 0.1	± 0.30   mA
$t_{ra}$	Reaction time @ 10 % of $I_{PN}$	< 500	ns
$t_r$	Response time <sup>2)</sup> to 90 % of $I_{PN}$ step	< 1	µs
$di/dt$	$di/dt$ accurately followed	> 100	A/µs
<b>BW</b>	Frequency bandwidth (- 1 dB)	DC .. 100	kHz

## General data

$T_A$	Ambient operating temperature	- 10 .. + 70	°C
$T_S$	Ambient storage temperature	- 25 .. + 85	°C
$R_S$	Secondary coil resistance @ $T_A = 70^\circ\text{C}$	42	Ω
$m$	Mass	95	g
	Standards	EN 50178: 1997	

**Notes:** <sup>1)</sup> The result of the coercive of the magnetic circuit

<sup>2)</sup> With a  $di/dt$  of 100 A/µs.

## Features

- Closed loop (compensated) current transducer using the Hall effect
- Isolated plastic case recognized according to UL 94-V0.

## Special features

- $V_C = \pm 24 \text{ V}$  (± 5%)
- $R_S = 42 \Omega$  @  $T_A = 70^\circ\text{C}$
- Connection to secondary circuit on JST B 3P-VH connector.

## Advantages

- Excellent accuracy
- Very good linearity
- Low temperature drift
- Optimized response time
- Wide frequency bandwidth
- No insertion losses
- High immunity to external interference
- Current overload capability.

## Applications

- AC variable speed drives and servo motor drives
- Static converters for DC motor drives
- Battery supplied applications
- Uninterruptible Power Supplies (UPS)
- Switched Mode Power Supplies (SMPS)
- Power supplies for welding applications.

## Application domain

- Industrial.

**Isolation characteristics**

$V_d$	Rms voltage for AC isolation test, 50/60 Hz, 1 min	3	kV
$\hat{V}_w$	Impulse withstand voltage 1.2/50 $\mu$ s	10	kV
		Min	
$V_e$	Partial discharge extinction voltage rms @ 10 pC	2	kV
		Min	
dCp	Creepage distance	11.9	mm
dCI	Clearance distance	11.5	mm
CTI	Comparative Tracking Index (group II)	175	

**Applications examples**

According to EN 50178 and IEC 61010-1 standards and following conditions:

- Over voltage category OV 3
- Pollution degree PD2
- Non-uniform field

	EN 50178	IEC 61010-1
dCp, dCI, $\hat{V}_w$	Rated isolation voltage	Nominal voltage
Single isolation	1000 V	1000 V
Reinforced isolation	500 V	500 V

**Safety**




This transducer must be used in electric/electronic equipment with respect to applicable standards and safety requirements in accordance with the manufacturer’s operating instructions.



Caution, risk of electrical shock

When operating the transducer, certain parts of the module can carry hazardous voltage (eg. primary busbar, power supply). Ignoring this warning can lead to injury and/or cause serious damage. This transducer is a build-in device, whose conducting parts must be inaccessible after installation. A protective housing or additional shield could be used. Main supply must be able to be disconnected.

**Dimensions LF 305-S/SP16** (in mm. 1 mm = 0.0394 inch)

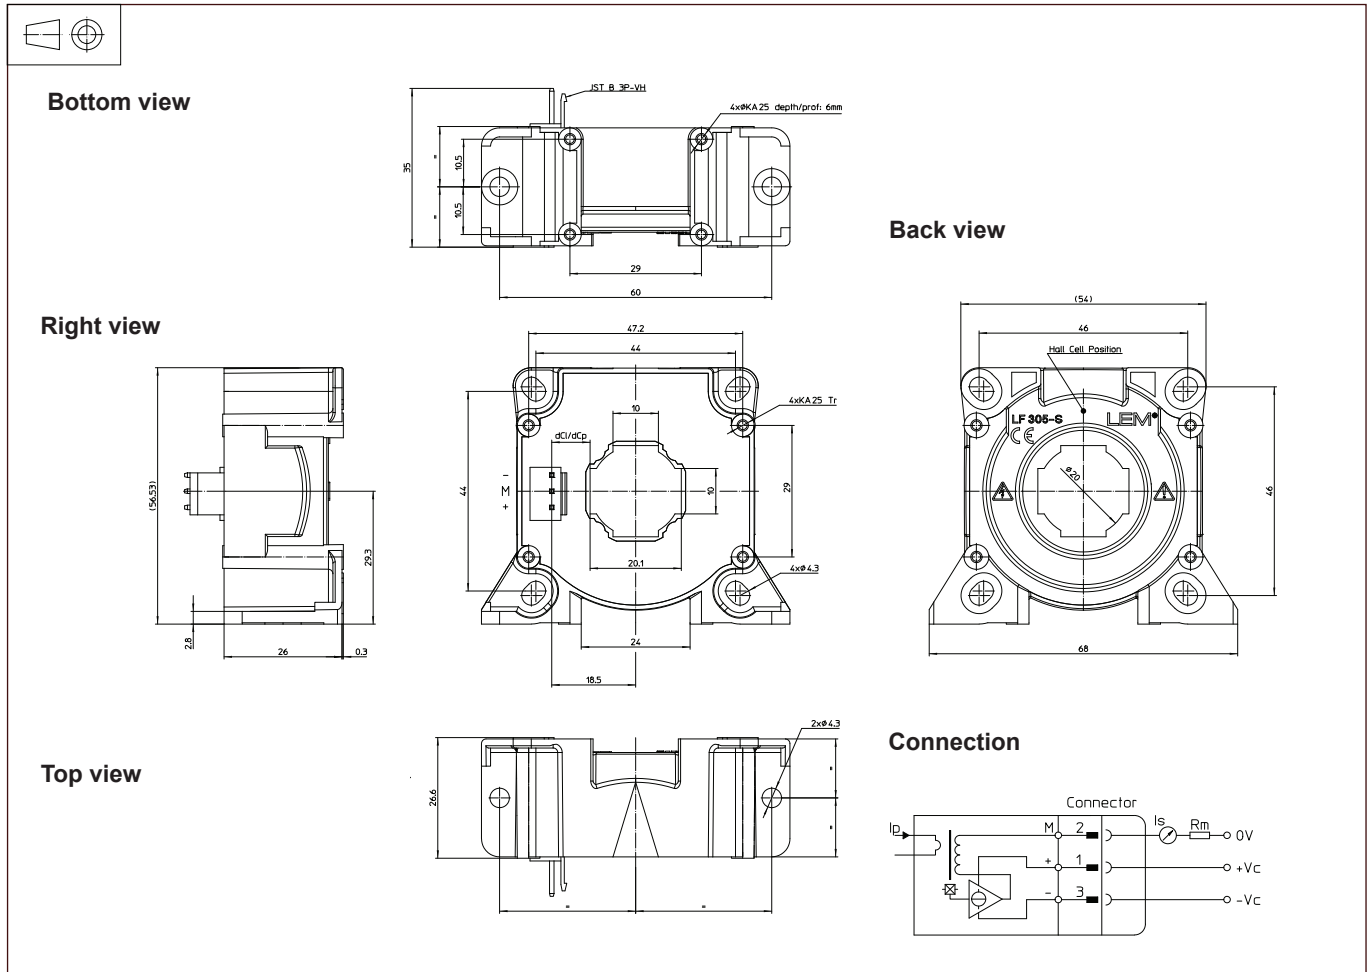

**Mechanical characteristics**

- General tolerance  $\pm 0.5$  mm
- Transducer fastening
  - Vertical position
    - 2 holes  $\text{Ø} 4.3$  mm
    - 2 M4 steel screws
    - Recommended fastening torque 3.2 Nm or 2.37 Lb.-Ft.
  - or
  - Horizontal position
    - 4 holes  $\text{Ø} 4.3$  mm
    - 4 M4 steel screws
    - Recommended fastening torque 0.7 Nm or 0.52 Lb.-Ft.
- Recommended fastening torque
  - or
  - Vertical position
    - 4 holes  $\text{Ø} 1.9$  mm, depth: 7 mm
    - 4 PT KA 25 screws, length: 6 mm
    - Recommended fastening torque 3.2 Nm or 2.37 Lb.-Ft.
  - or
  - Horizontal position
    - 4 holes  $\text{Ø} 1.9$  mm, length: 10 mm
    - 4 PT KA 25 screws, length: 10 mm
    - Recommended fastening torque 3.2 Nm or 2.37 Lb.-Ft.
- Recommended fastening torque 0.75 Nm or 0.55 Lb.-Ft.
- Primary through-hole  $\text{Ø} 20$  mm
- Connection of secondary JST B 3P-VH

**Remarks**

- $I_S$  is positive when  $I_p$  flows in the direction of the arrow.
- Temperature of the primary conductor should not exceed  $100^\circ\text{C}$ .
- Dynamic performances ( $di/dt$  and response time) are best with a single bar completely filling the primary hole.